

P5DH FULL COLOR LED SCREEN. Horizontal

Outdoor > Front opening

Descripción:

P5 full color led screen for outdoor use with front opening and measures of 960*640mm. High visibility, durability and versatility, resulting in a brightness of \pm 5,000 / 5,500nits

Possibility of texts, videos, images, pictograms, date, time, temperature, etc. And remote control though Cosmi server

Wifi, 3G / 4G, brightness sensor and optional temperature sensor.

Outstanding Features:















Measures:





Technical specifications:

LED	SMD
Pitch	5mm
Resolution	192*128px/cabinet
Brightness	±5.000/ 5.500nits
View distance	≥5m
Viewing angle	140°H / 130°V
Maximum consumption	≤514w
Average consumption	± 206w
Working voltage	AC200-230V
Chassis	Metal. Oven lacquered
Opening	Front
Scanning	1/8
Frequency	3840Hz
Working temp.	-20° / +45°
Working humidity	10-90%
software	Included. Multilanguage
Connectivity	TCP / IP (network cable), USB memory
	.3G / 4G WIFI. Optional Cosmi Server
Weight	±29,8 Kg net / 33,1Kg + packaging
Measures with packaging	1035*715*195mm
Gray Scale	14-16 Bits

Ref. 292935





Warranty | 2 years

Observations

* Only horizontal installation is allowed

* When installing, a clearance of at least 80 mm must be left between the top and bottom.








Annotations cabin P5

Outdoor. Front opening

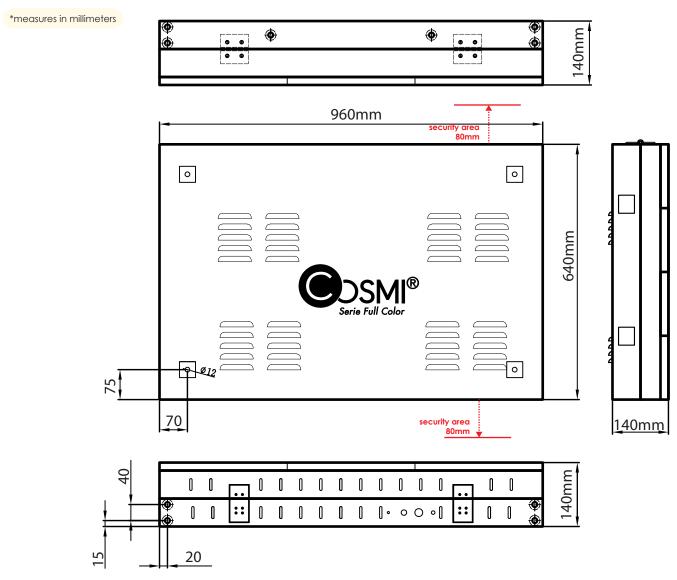

Observations:

- There shouldn't be any deformations on the surface where the screen will be installed
- Avoid blows that could damage the chassis or the LED boards
- When leaving the screen on the ground: first support the rear of the chassis and then the front
- Is not allowed the obstruction of the air inlets and outlets of the chassis
- Perforations or deformations that may affect the inside of the screen are not allowed
- Mandatory horizontal mounting, when the installation is outdoors
- The installation can be only in horizontal line
- * When installing, a clearance of at least 80 mm must be left between the top and bottom.

